


Ahouse Sliding Gate Opener - SD

DC24V Sliding Gate Opener

DC 24V

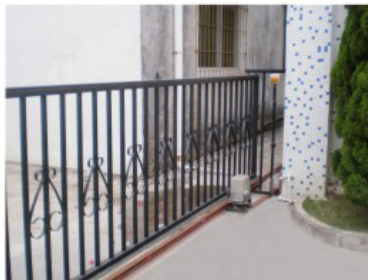

Solar Sliding Gate Opener

SD

Suitable for residential yard gate, villa gate,
factory gate, iron gate, stainless steel gate and wood gate

-
1. DC24V motor, the design of integrated mechanic and electric structure streamline fashionable outline.
 2. Pedestrian open and full open adjustable, opening percentage can be adjusted.
 3. Self calculating smart sensor system, accurate gate open and close position, provide best security.
 4. Full speed or tri speed operation selection.
 5. Safety detection: automatic stop for resistance during opening gate, automatic reverse for resistance during closing gate.
 6. With interface of flashing lamp (AC/ DC) for pre-warning.
 7. Closing gate delay time adjustable.
 8. Backup battery is available, can work during power failure, battery status display.
 9. Magnetic limit switch optional.
 10. Optional parts: Flashing light, Photocell, Keypad system, Solar system etc.
 11. Quality assurance, CE and IP57 approved product.

DC24V Sliding Gate Opener

■ Electrical

Power supply	AC110V ~ 240V
Operating Voltage	DC 24V
Electronic Controller	Microcontroller Based
Safety Detection	Over Current Detection
Safety Barrier	Infrared Beam Sensor (optional)
IP Rating	IP57

■ Mechanical

Model	SD
Max. Gate Weight	800 kg
Gate moving speed	13m/min
Gate Limit type	Intelligent Position Detection/ Magnetic Limit Switch (optional)
Operating distance	≥50m Frequency:433.92 MHz
Remote control mode	Close/ Open/ Stop/ Pedestrian Open
Auto close time	0~99 sec (Adjustable)
Noise	≤65dB
Product actual size	29*22*23 cm
Packing size	36*29*34 cm
Environmental temperature	-15℃ to +55℃

Chain Type Sliding Gate Opener



DC 24V




Optional Parts

Steel Rack
Nylon Rack
Chain Gear/rack
Solar Control System
Limit Switch
Photocell
Flashing Light
Backup Battery
Push Button
Keypad System



Chain Type Sliding Gate Opener

SD
Solar

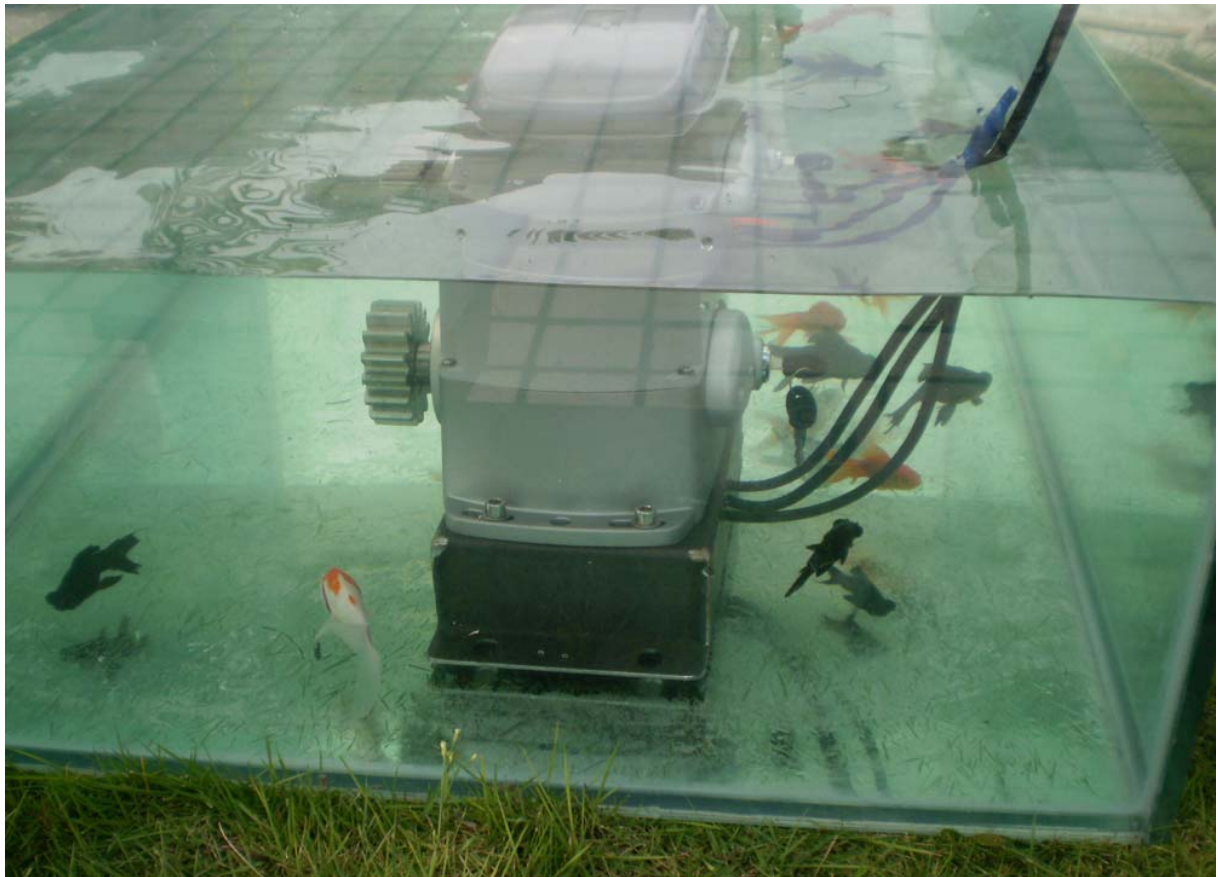

Ahouse

Optional Accessories for Sliding gate opener



Nylon Rail



Steel Rail



DC Flashing Light



AC Flashing Light



Photocell





Keypad



Push Button



Remote Control

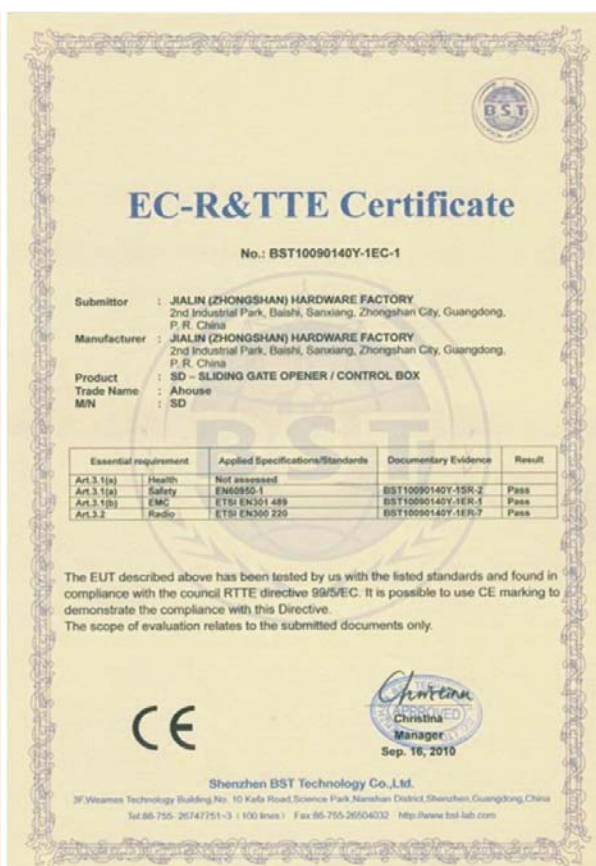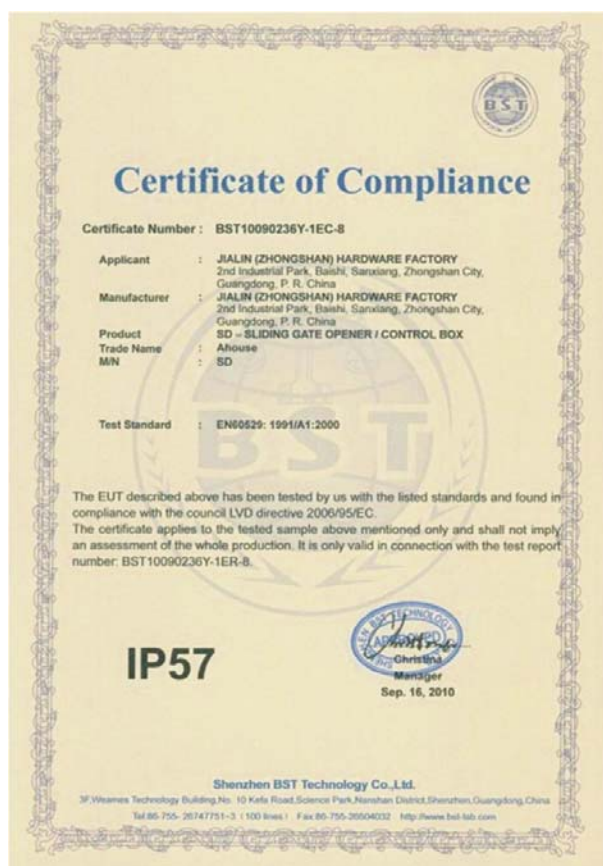

Ahouse Mechanical and Electrical Co., LTD.

Email: sales@ahouse-gb.com

<http://www.ahouse-gb.com>